

TOPSUN

BIFACIAL

HIGH PERFORMANCE
MONOCRYSTALLINE
N- TYPE TECHNOLOGY

144


TOP - 570/590M-144BI

144 CELL
Mono N - Type Module

570 - 590Wp
Power Output Range

1500VDC
Maximum System Voltage

22.83%
Maximum Efficiency

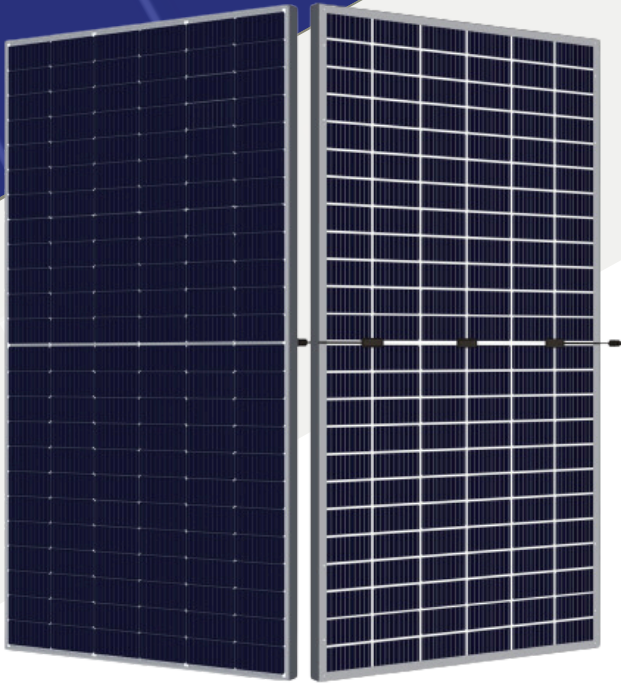

KEY SALIENT FEATURES



Industry leading lowest thermal co-efficient of power



Industry leading 15 years product warranty



Excellent low irradiance performance



Excellent PID resistance



Positive power tolerance of 0~+3%



Fully automated production at all stages



Fully Reduced power loss by minimizing the effect of shadow shading (9 - 18 Busbar)



European Warranty & After - Sales Service



TAMESOL BUILDING A GREEN FUTURE S.L

TAMESOL is a global provider of high-efficiency PV panels with a 10GW annual production capacity and a 100% automated production line, innovating state-of-the-art products for over 15 years. Our panels have been installed in more than 50 countries, with over 20 million panels already connected to the grid.


Tel : +34 872 222 388

E - mail: info@tamesol.com Website: www.tamesol.com

TAMESOL
Energia para vivir

LINEAR PERFORMANCE WARRANTY

15 year Product Warranty / 30-Year Linear Power Warranty

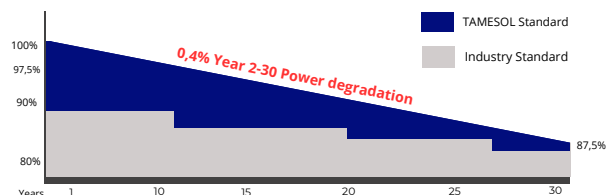


Since 2007, building a green future

22,83% MAX MODULE EFFICIENCY	0 - +3% POWER TOLERANCE	1,0% FIRST YEAR POWER DEGRADATION	0,40% YEAR 2-30 POWER DEGRADATION	N-TYPE CELL Lower operating temperature
--	-----------------------------------	---	---	---

ELECTRICAL CHARACTERISTICS		STC: AM1.5 1.000W/m2		NOTC: AM1.5 800W/m2 20° 1 m/s		Test uncertainty for Pmax 0 - +3%				
Module type	TOP - 570M-144BI		TOP - 575M-144BI		TOP - 580M-144BI		TOP - 585M-144BI		TOP - 590M-144BI	
Testing condition	STC	NOTC	STC	NOTC	STC	NOTC	STC	NOTC	STC	NOTC
Maximum Power (Pmax/w)	570	429	575	433	580	437	585	441	590	445
Open Circuit Voltage (Voc/V)	50,74	48,20	50,88	48,33	51,02	48.46	51,16	48.59	51,30	48.72
Short Circuit Current (Isc/A)	14,31	11,55	14,39	11,62	14,47	11,68	14,55	11,77	14,63	11,83
Voltage at Maximum Power (Vmp/V)	42,07	39,51	42,22	39.64	42,37	39.77	42,52	39.90	42,52	40,03
Current at maximum Power (Imp/A)	13,55	10,85	13,62	10,91	13,69	10,97	13,76	11.06	13,83	11.12
Module Efficiency (%)	22,07%		22,26%		22,45%		22,64%		22,83%	

MECHANICAL PARAMETERS	
Cell Orientation	single crystal N-Topcon 182x91mm (144 pieces)
Junction Box	IP68, three diodes
Output Cable	4.0mm² 300mm(+) / 300mm(-) or customized
Glass	2.0mm / 2.0mm
Frame	Anodized aluminum alloy frame
Weight	32,32,5 kg
Dimensión	2278*1134*30mm
Packaging	36/37pcs*pallet / 720/740 pcs*40HC

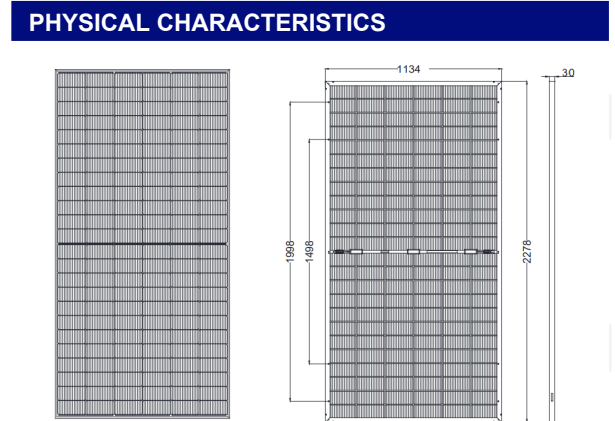

OPERATING PARAMETERS	
Operational Temperature	-40°C - +85°C
Power Output Tolerance	(0, +3%)
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	30 A
Nominal Operating Cell Temperature	45±2°C
Protection Glass	Class II
Fire Rating	Class C
Bifacial - Factor	80% ± 10%

MECHANICAL LOADING	
Front Side Maximum Static Loading	5400 PA
Rear Side Maximum Static Loading	2400 PA

TEMPERATURA RATINGS (STC)	
Temperature Coefficient of Isc	+0.046%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Pmax	-0.30%/°C

PACKING MANNER	
Container	40ft(HQ)
Number of modules per container	720/740
Number of modules per pallet	36/740
Number of pallets per container	20

TAMESOL Authorized Solar Dealer

Note: The specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m2 solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800 W/m2, 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum. Please contact info@tamesol.com for technical support. The actual transactions will be subject to the contracts. This parameter is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.