


TOPSUN

BIFACIAL

HIGH PERFORMANCE
MONOCRYSTALLINE
N-TYPE TECHNOLOGY

108

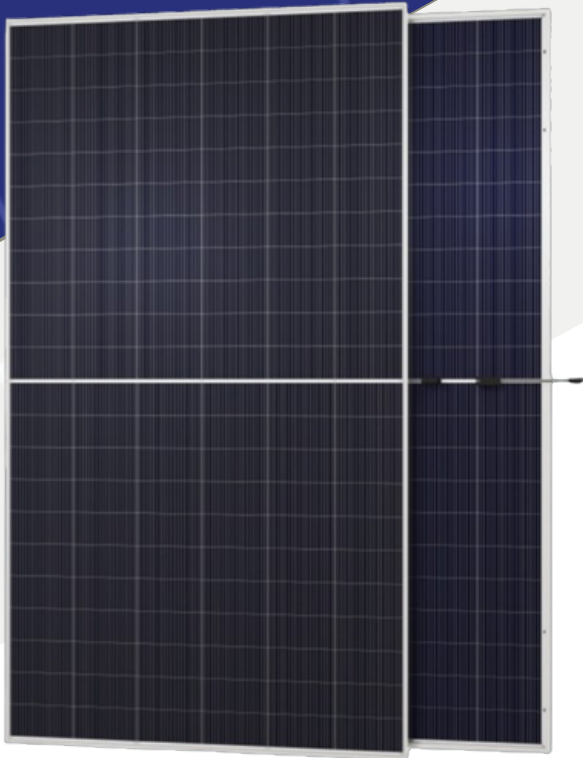

TOP - 415/435M-108BI

108 CELL
Mono N - Type Module

415 - 435Wp
Power Output Range

Double Glass
Transparent Backsheet

22.28%
Maximum Efficiency

KEY SALIENT FEATURES



Industry leading lowest thermal co-efficient of power



Industry leading 15 years product warranty



Excellent low irradiance performance



Excellent PID resistance



Positive power tolerance of 0~+5%



Fully automated production at all stages



Fully Reduced power loss by minimizing the effect of shadow shading (9 - 18 Busbar)



EU Brand & european after sales service



TAMESOL BUILDING A GREEN FUTURE S.L


TAMESOL is a global provider of high-efficiency PV panels with a 10GW annual production capacity and a 100% automated production line, innovating state-of-the-art products for over 15 years. Our panels have been installed in more than 50 countries, with over 20 million panels already connected to the grid.

Tel : +34 933 801 596

E - mail: info@tamesol.com Website: www.tamesol.com

LINEAR PERFORMANCE WARRANTY

15 year Product Warranty / 30-Year Linear Power Warranty

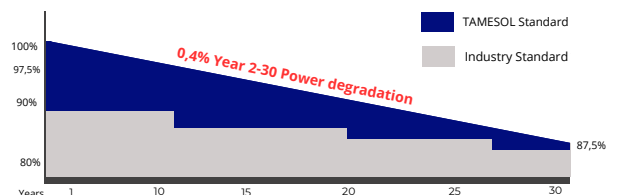

TAMESOL
Energia para vivir

*Since 2007,
building a green future*

22,28% MAX MODULE EFFICIENCY	0 - +3% POWER TOLERANCE	1,0% FIRST YEAR POWER DEGRADATION	0,40% YEAR 2-30 POWER DEGRADATION	N-TYPE CELL Lower operating temperature
--	-----------------------------------	---	---	---


ELECTRICAL CHARACTERISTICS STC: AM1.5 1.000W/m2 NOTC: AM1.5 800W/m2 20° 1 m/s Test uncertainty for Pmax 0 - +3%

Module type	TOP - 415M-108BI		TOP - 420M-108BI		TOP - 425M-108BI		TOP - 430M-108BI		TOP - 435M-108BI	
	STC	NOTC	STC	NOTC	STC	NOTC	STC	NOTC	STC	NOTC
Testing condition										
Maximum Power (Pmax/w)	415	318	420	321	425	325	430	329	435	333
Open Circuit Voltage (Voc/V)	37.92	36,76	38,11	37.04	38.30	37.33	38.49	36,57	38.68	37.87
Short Circuit Current (Isc/A)	13,99	10.99	14.07	11,04	14.15	11,08	14.23	11,26	14.31	11,18
Voltage at Maximum Power (Vmp/V)	31.32	30.34	31.51	30.59	31.70	30.84	31.88	30,29	32.06	31.31
Current at maximum Power (Imp/A)	13.25	10,46	13,53	10,50	13,41	10,54	13,49	10,67	13,57	10,71
Module Efficiency (%)	21,25%		21,51%		21.76%		22,02%		22.28%	

MECHANICAL PARAMETERS

Cell Orientation	single crystal N-Topcon 182x91mm (108 pieces)
Junction Box	IP68, three diodes
Output Cable	4.0mm² 300mm(+) / 300mm(-) or customized
Glass	3.2mm / 3.2mm
Frame	Anodized aluminum alloy frame
Weight	20,23,24,8kg
Dimensión	1722*1134*30mm
Packaging	36/37 pcs*pallet / 936pcs*40HQ

PHYSICAL CHARACTERISTICS

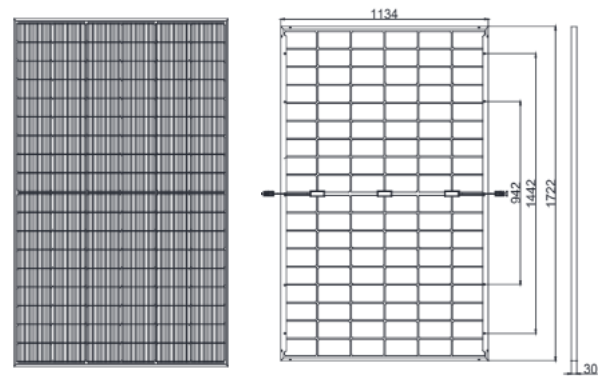

OPERATING PARAMETERS

Operational Temperature	-40°C - +85°C
Power Output Tolerance	(0, +3%)
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	25 A
Nominal Operating Cell Temperature	45±2°C
Protection Glass	Class II
Fire Rating	Class C
Bifacial - Factor	80% ± 10%

MECHANICAL LOADING


Front Side Maximum Static Loading	5400 PA
Rear Side Maximum Static Loading	2400 PA

TEMPERATURA RATINGS (STC)

Temperature Coefficient of Isc	+0.046%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Pmax	-0.30%/°C

PACKING MANNER

Container	40ft(HQ)
Number of modules per container	936/962
Number of modules per pallet	36/37
Number of pallets per container	26

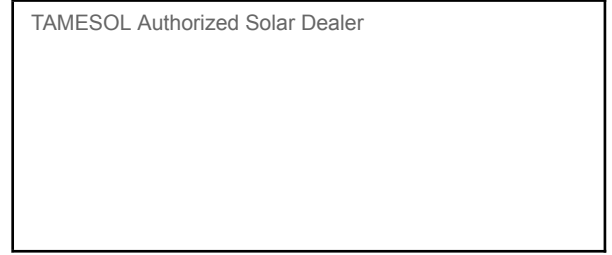

Note: The specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m2 solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800 W/m2, 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum. Please contact info@tamesol.com for technical support. The actual transactions will be subject to the contracts. This parameter is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.