


TOPSUN

BIFACIAL

HIGH PERFORMANCE
MONOCRYSTALLINE
N-TYPE TECHNOLOGY

156

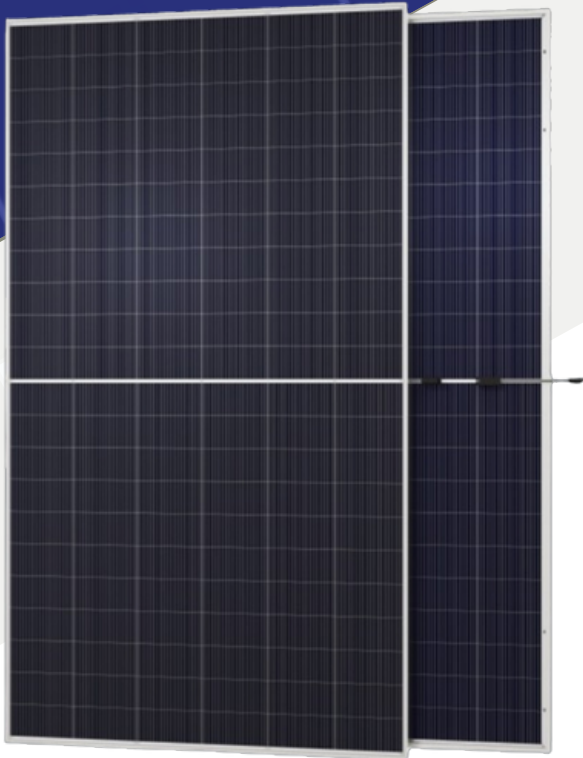

TOP - 620/640M-156BI

156 CELL
Mono N - Type Module

620 - 640Wp
Power Output Range

Double Glass
Transparent Backsheet

22.90%
Maximum Efficiency

KEY SALIENT FEATURES



Industry leading lowest thermal co-efficient of power



Industry leading 15 years product warranty



Excellent low irradiance performance



Excellent PID resistance



Positive power tolerance of 0~+3%



Fully automated production at all stages



Fully Reduced power loss by minimizing the effect of shadow shading (9 - 18 Busbar)



EU Brand & european after sales service



TAMESOL BUILDING A GREEN FUTURE S.L


TAMESOL is a global provider of high-efficiency PV panels with a 10GW annual production capacity and a 100% automated production line, innovating state-of-the-art products for over 15 years. Our panels have been installed in more than 50 countries, with over 20 million panels already connected to the grid.

Tel : +34 933 801 596

E - mail: info@tamesol.com Website: www.tamesol.com

LINEAR PERFORMANCE WARRANTY

15 year Product Warranty / 30-Year Linear Power Warranty

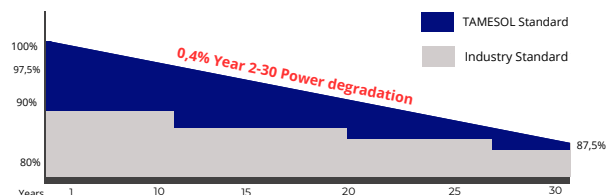

TAMESOL
Energia para vivir

*Since 2007,
building a green future*

22,90% MAX MODULE EFFICIENCY	0 - +3% POWER TOLERANCE	1,0% FIRST YEAR POWER DEGRADATION	0,40% YEAR 2-30 POWER DEGRADATION	N-TYPE CELL Lower operating temperature
--	-----------------------------------	---	---	---


ELECTRICAL CHARACTERISTICS STC: AM1.5 1.000W/m2 NOTC: AM1.5 800W/m2 20° 1 m/s Test uncertainty for Pmax 0 - +3%

Module type	TOP - 620M-156BI		TOP - 625M-156BI		TOP - 630M-156BI		TOP - 635M-156BI		TOP - 640M-156BI	
	STC	NOTC	STC	NOTC	STC	NOTC	STC	NOTC	STC	NOTC
Maximum Power (Pmax/w)	620	467	625	471	630	475	635	479	640	483
Open Circuit Voltage (Voc/V)	56.82	53.97	56.95	54.10	57.08	54.22	57.21	54.34	57.34	54.46
Short Circuit Current (Isc/A)	13.74	11.09	13.80	11.14	13.86	11.19	13.92	11.24	13.60	11.29
Voltage at Maximum Power (Vmp/V)	47.37	44.54	47.54	44.69	47.70	44.83	47.86	44.98	48.02	45.13
Current at maximum Power (Imp/A)	13.09	10.59	13.15	10.54	13.21	10.59	13.27	10.64	13.86	11.75
Module Efficiency (%)	22.18%		22,36%		22,54%		22,72%		22,90%	

MECHANICAL PARAMETERS

Cell Orientation	single crystal N-Topcon 182x99,5mm (156 pieces)
Junction Box	IP68, three diodes
Output Cable	4.0mm² 300mm(+) / 300mm(-) or customized
Glass	2.0mm tempered coated glass, low iron
Frame	Anodized aluminum alloy frame
Weight	34,5, 35 kg
Dimensión	2465*1134*30mm
Packaging	36/ 37 pcs*pallet / 576/592pcs*40HQ

PHYSICAL CHARACTERISTICS

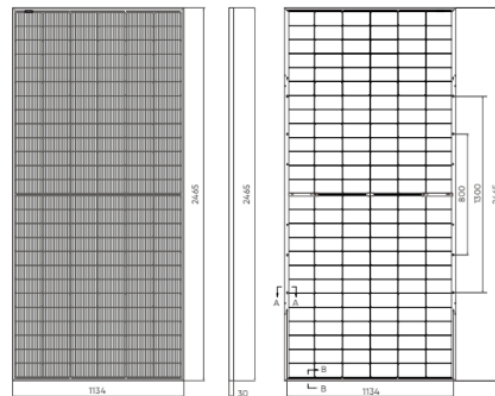

OPERATING PARAMETERS

Operational Temperature	-40°C - +85°C
Power Output Tolerance	(0, +3%)
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	25 A
Nominal Operating Cell Temperature	45±2°C
Protection Glass	Class II
Fire Rating	Class C
Bifacial - Factor	80% ± 10%

MECHANICAL LOADING

Front Side Maximum Static Loading	5400 PA
Rear Side Maximum Static Loading	2400 PA

TEMPERATURA RATINGS (STC)

Temperature Coefficient of Isc	+0.046%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Pmax	-0.30%/°C

PACKING MANNER

Container	40ft(HQ)
Number of modules per container	576/592
Number of modules per pallet	36/37
Number of pallets per container	16

TAMESOL Authorized Solar Dealer

Note: The specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m2 solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800 W/m2, 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum. Please contact info@tamesol.com for technical support. The actual transactions will be subject to the contracts. This parameter is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.