

PERC**MAX**

BIFACIAL

HIGH PERFORMANCE
BIFACIAL MONOCRYSTALLINE
P.E.R.C MODULE

144


TM - 535/555M-144BI

144 CELL
Mono PERC Module

535 - 555Wp
Power Output Range

1500VDC
Maximum System Voltage

21.70%
Maximum Efficiency

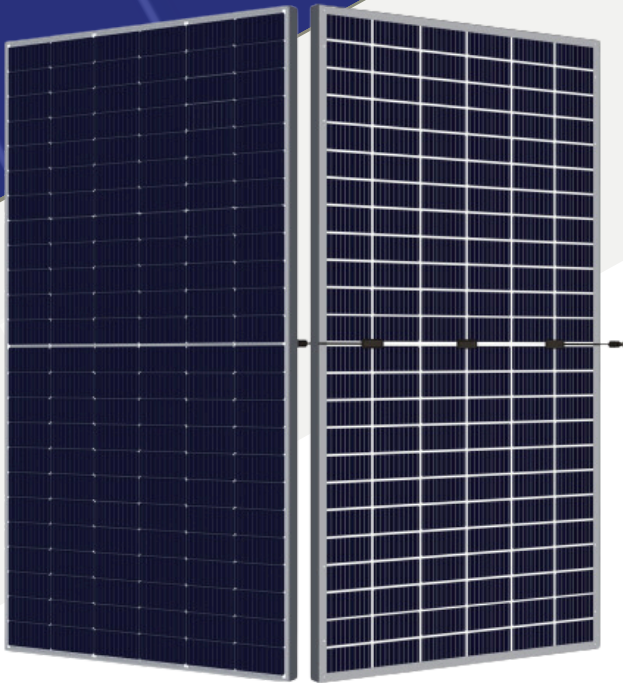

KEY SALIENT FEATURES



Industry leading lowest thermal co-efficient of power



Industry leading 15 years product warranty



Excellent low irradiance performance



Excellent PID resistance



Positive power tolerance of 0~+3%



Fully automated production at all stages



Fully Reduced power loss by minimizing the effect of shadow shading (9 - 18 Busbar)



European Warranty & After - Sales Service



TAMESOL BUILDING A GREEN FUTURE S.L


TAMESOL is a global provider of high-efficiency PV panels with a 10GW annual production capacity and a 100% automated production line, innovating state-of-the-art products for over 15 years. Our panels have been installed in more than 50 countries, with over 20 million panels already connected to the grid.

Tel : +34 872 222 388

E - mail: info@tamesol.com Website: www.tamesol.com

LINEAR PERFORMANCE WARRANTY

15 year Product Warranty / 30-Year Linear Power Warranty

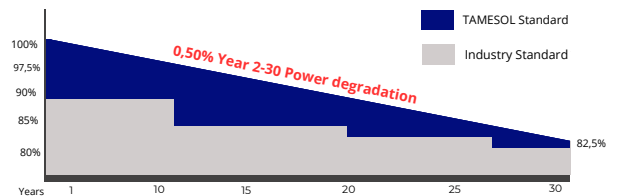

TAMESOL 15 YEARS

Since 2007, building a green future

21,70% MAX MODULE EFFICIENCY	0 - +3% POWER TOLERANCE	2,0% FIRST YEAR POWER DEGRADATION	0,50% YEAR 2-30 POWER DEGRADATION	PERC CELL Lower operating temperature
--	-----------------------------------	---	---	---


ELECTRICAL CHARACTERISTICS STC: AM1.5 1.000W/m2 NOTC: AM1.5 800W/m2 20° 1 m/s Test uncertainty for Pmax 0 - +3%

Module type	TM - 535M-144BI		TM - 540M-144BI		TM - 545M-144BI		TM - 550M-144BI		TM - 555M-144BI	
	STC	NOTC	STC	NOTC	STC	NOTC	STC	NOTC	STC	NOTC
Maximum Power (Pmax/w)	535	404.8	540	408.6	545	412.4	550	416.2	555	420
Open Circuit Voltage (Voc/V)	48.96	46,21	49,24	46,48	49,52	46,74	49,80	47.01	50.08	47.28
Short Circuit Current (Isc/A)	13,73	11.00	13,78	11.04	13,83	11.08	13,88	11.12	13,93	11,60
Voltage at Maximum Power (Vmp/V)	41,22	38.23	41,45	38.45	41,70	38.67	41,93	38.90	42,18	39.12
Current at maximum Power (Imp/A)	12,98	10.58	13.03	10.62	13.07	10,66	13,12	10,70	13,16	10,74
Module Efficiency (%)	20,90%		21.10%		21,30%		21,50%		21,70%	

MECHANICAL PARAMETERS

Cell Orientation	single crystal PERC182x91mm (144 pieces)
Junction Box	IP68, three diodes
Output Cable	300mm (can be customized)
Glass	3.2mm tempered coated glass, low iron
Frame	Anodized aluminum alloy frame
Weight	32.6kg
Dimensión	2279*1134*35mm
Packaging	31 pcs*pallet / 620 pcs*40HQ

PHYSICAL CHARACTERISTICS

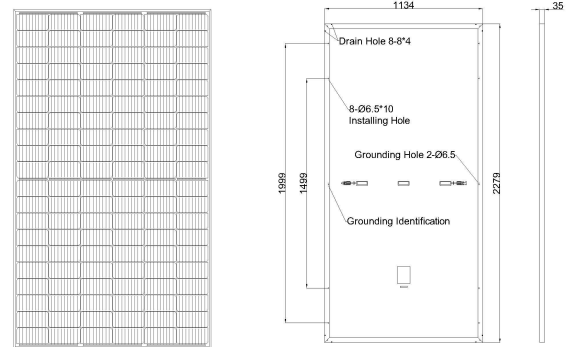

OPERATING PARAMETERS

Operational Temperature	-40°C - +85°C
Power Output Tolerance	(0, +3%)
Maximum System Voltage	1500V DC
Maximum Series Fuse Rating	25 A
Nominal Operating Cell Temperature	45±2°C
Protection Glass	Class II
Fire Rating	Class C
Bifacial- Factor	70%±5%

MECHANICAL LOADING

Front Side Maximum Static Loading	5400 PA
Rear Side Maximum Static Loading	2400 PA

TEMPERATURA RATINGS (STC)

Temperature Coefficient of Isc	+0.05%/°C
Temperature Coefficient of Voc	-0.27%/°C
Temperature Coefficient of Pmax	-0.36%/°C

PACKING MANNER

Container	40ft(HQ)
Number of modules per container	620
Number of modules per pallet	31
Number of pallets per container	20

TAMESOL Authorized Solar Dealer

Note: The specifications are obtained under the Standard Test Conditions (STCs): 1000 W/m2 solar irradiance, 1.5 Air Mass, and cell temperature of 25°C. The NOCT is obtained under the Test Conditions: 800 W/m2, 20°C ambient temperature, 1m/s wind speed, AM 1.5 spectrum. Please contact info@tamesol.com for technical support. The actual transactions will be subject to the contracts. This parameter is for reference only and it is not a part of the contracts. The specifications are subject to change without prior notice.